



LUXURY VINYL TILE

NEW WORLD OF COLOUR
商用片材
HOYTECH FLOOR 木纹、石纹、毯纹



www.hoytechfloor.com
sales@hoy-tech.com.cn
(0086) 0573-89050111
Zhejiang Hoy Technology Co., Ltd.
No.777,Yanshan Road,Ganpu Town,Haiyan Country,Jiaxing City,Zhejiang,China



SPC/LVT FLOORING





HYW73052



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



HYW73053

效果图及产品图片仅供纹理参考，地板颜色请以实际为准



HYW73051



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



HYW73054



HYW73055



HYW73056



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



效果图及产品图片仅供纹理参考，地板颜色请以实际为准



HYW73057







效果图及产品图片仅供纹理参考，地板颜色请以实际为准

效果图及产品图片仅供纹理参考，地板颜色请以实际为准

HYW73060


HYW73061

HYW73063



HYW73062

效果图及产品图片仅供纹理参考，地板颜色请以实际为准

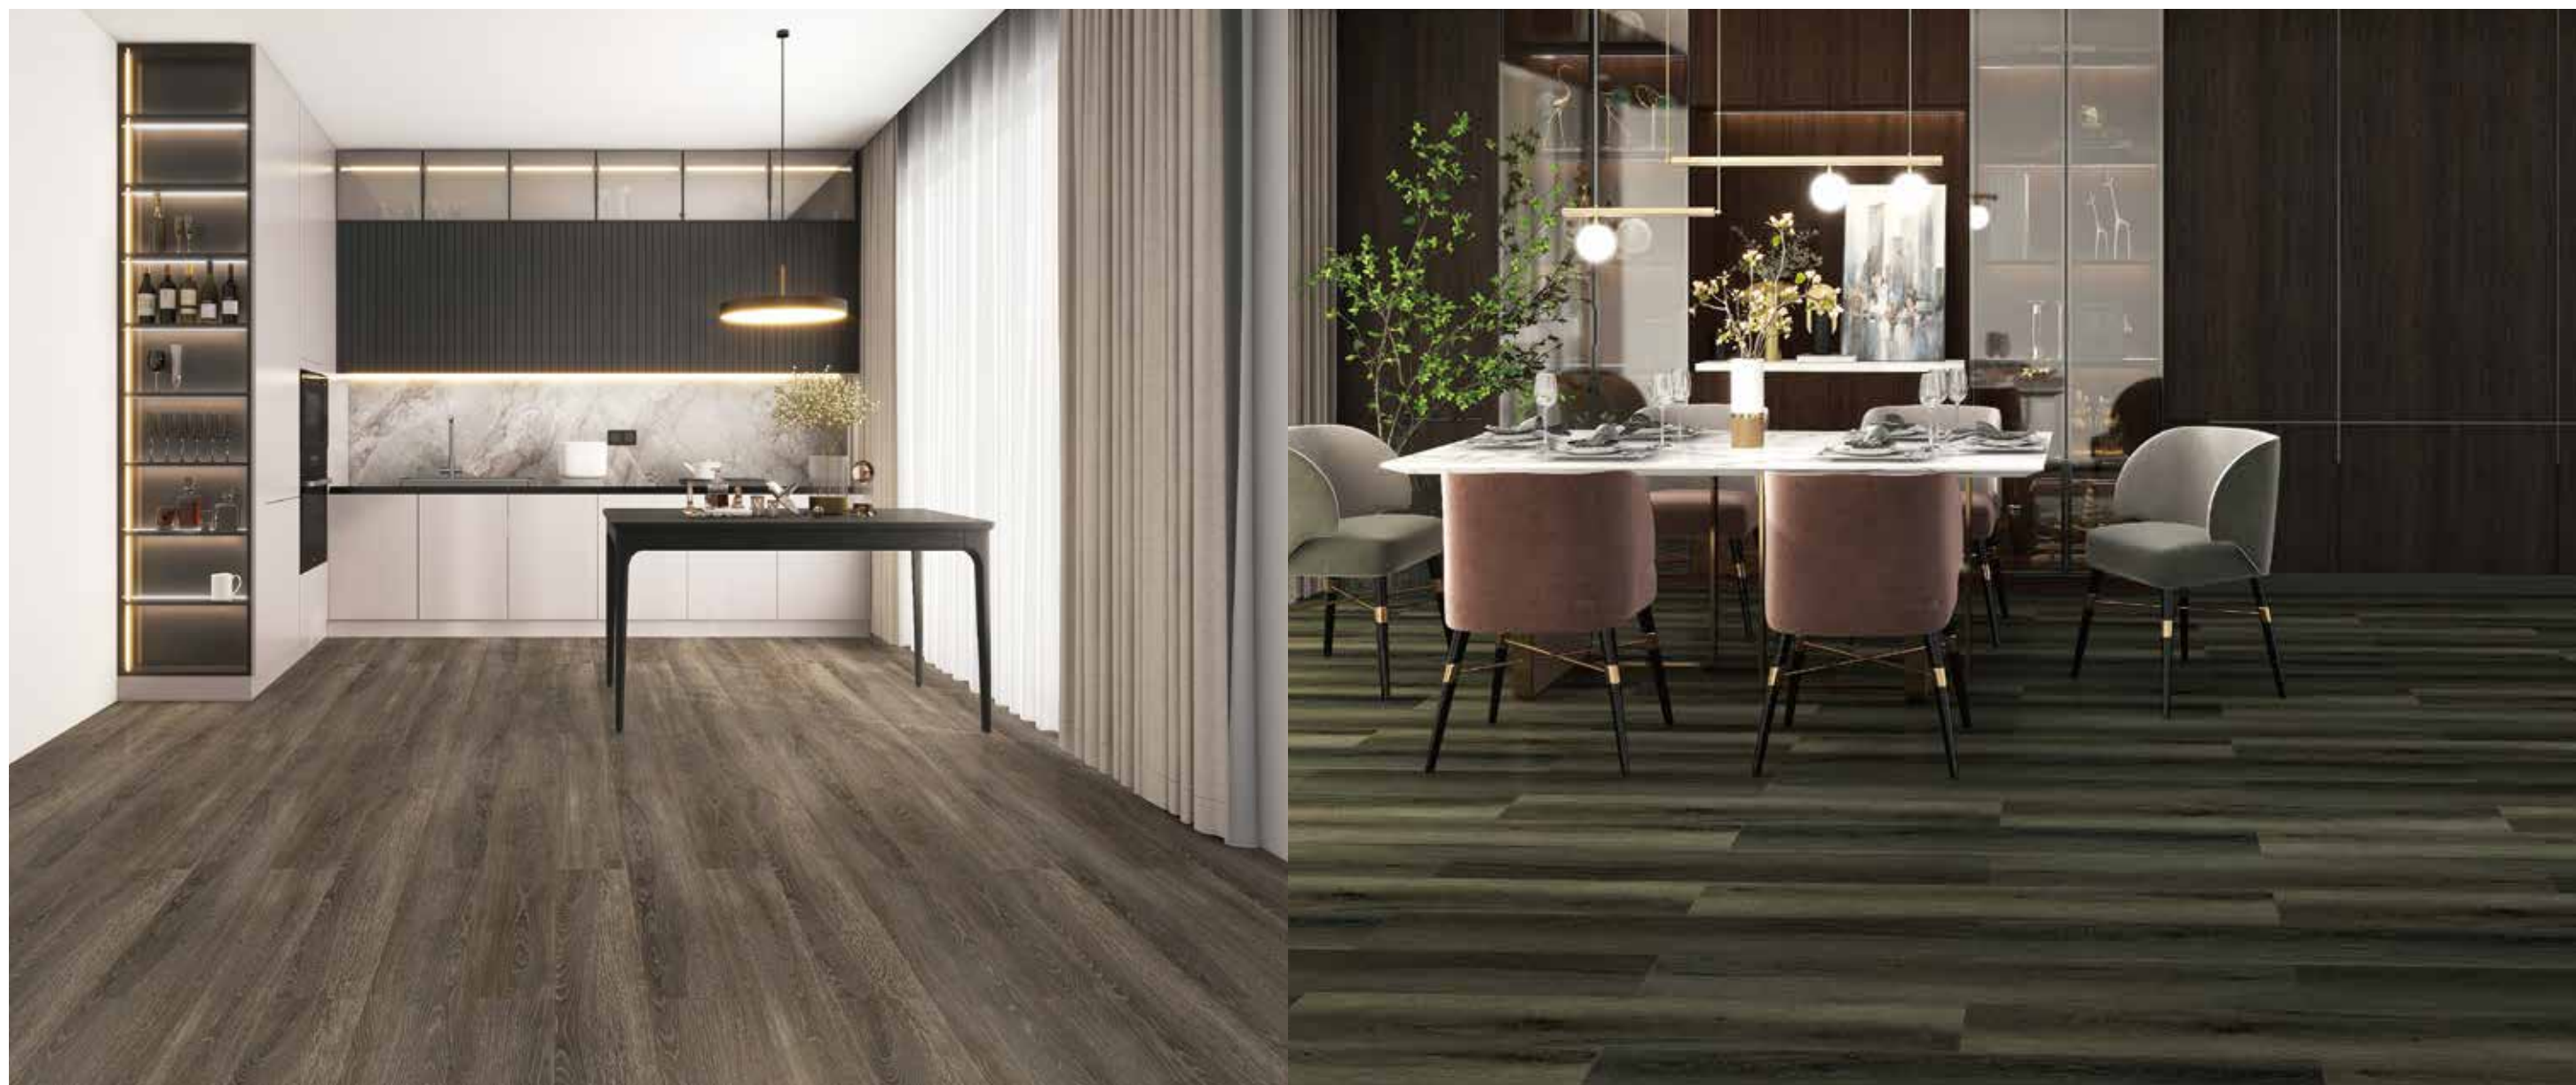


效果图及产品图片仅供纹理参考，地板颜色请以实际为准

效果图及产品图片仅供纹理参考，地板颜色请以实际为准






HYW73064

HYW73065

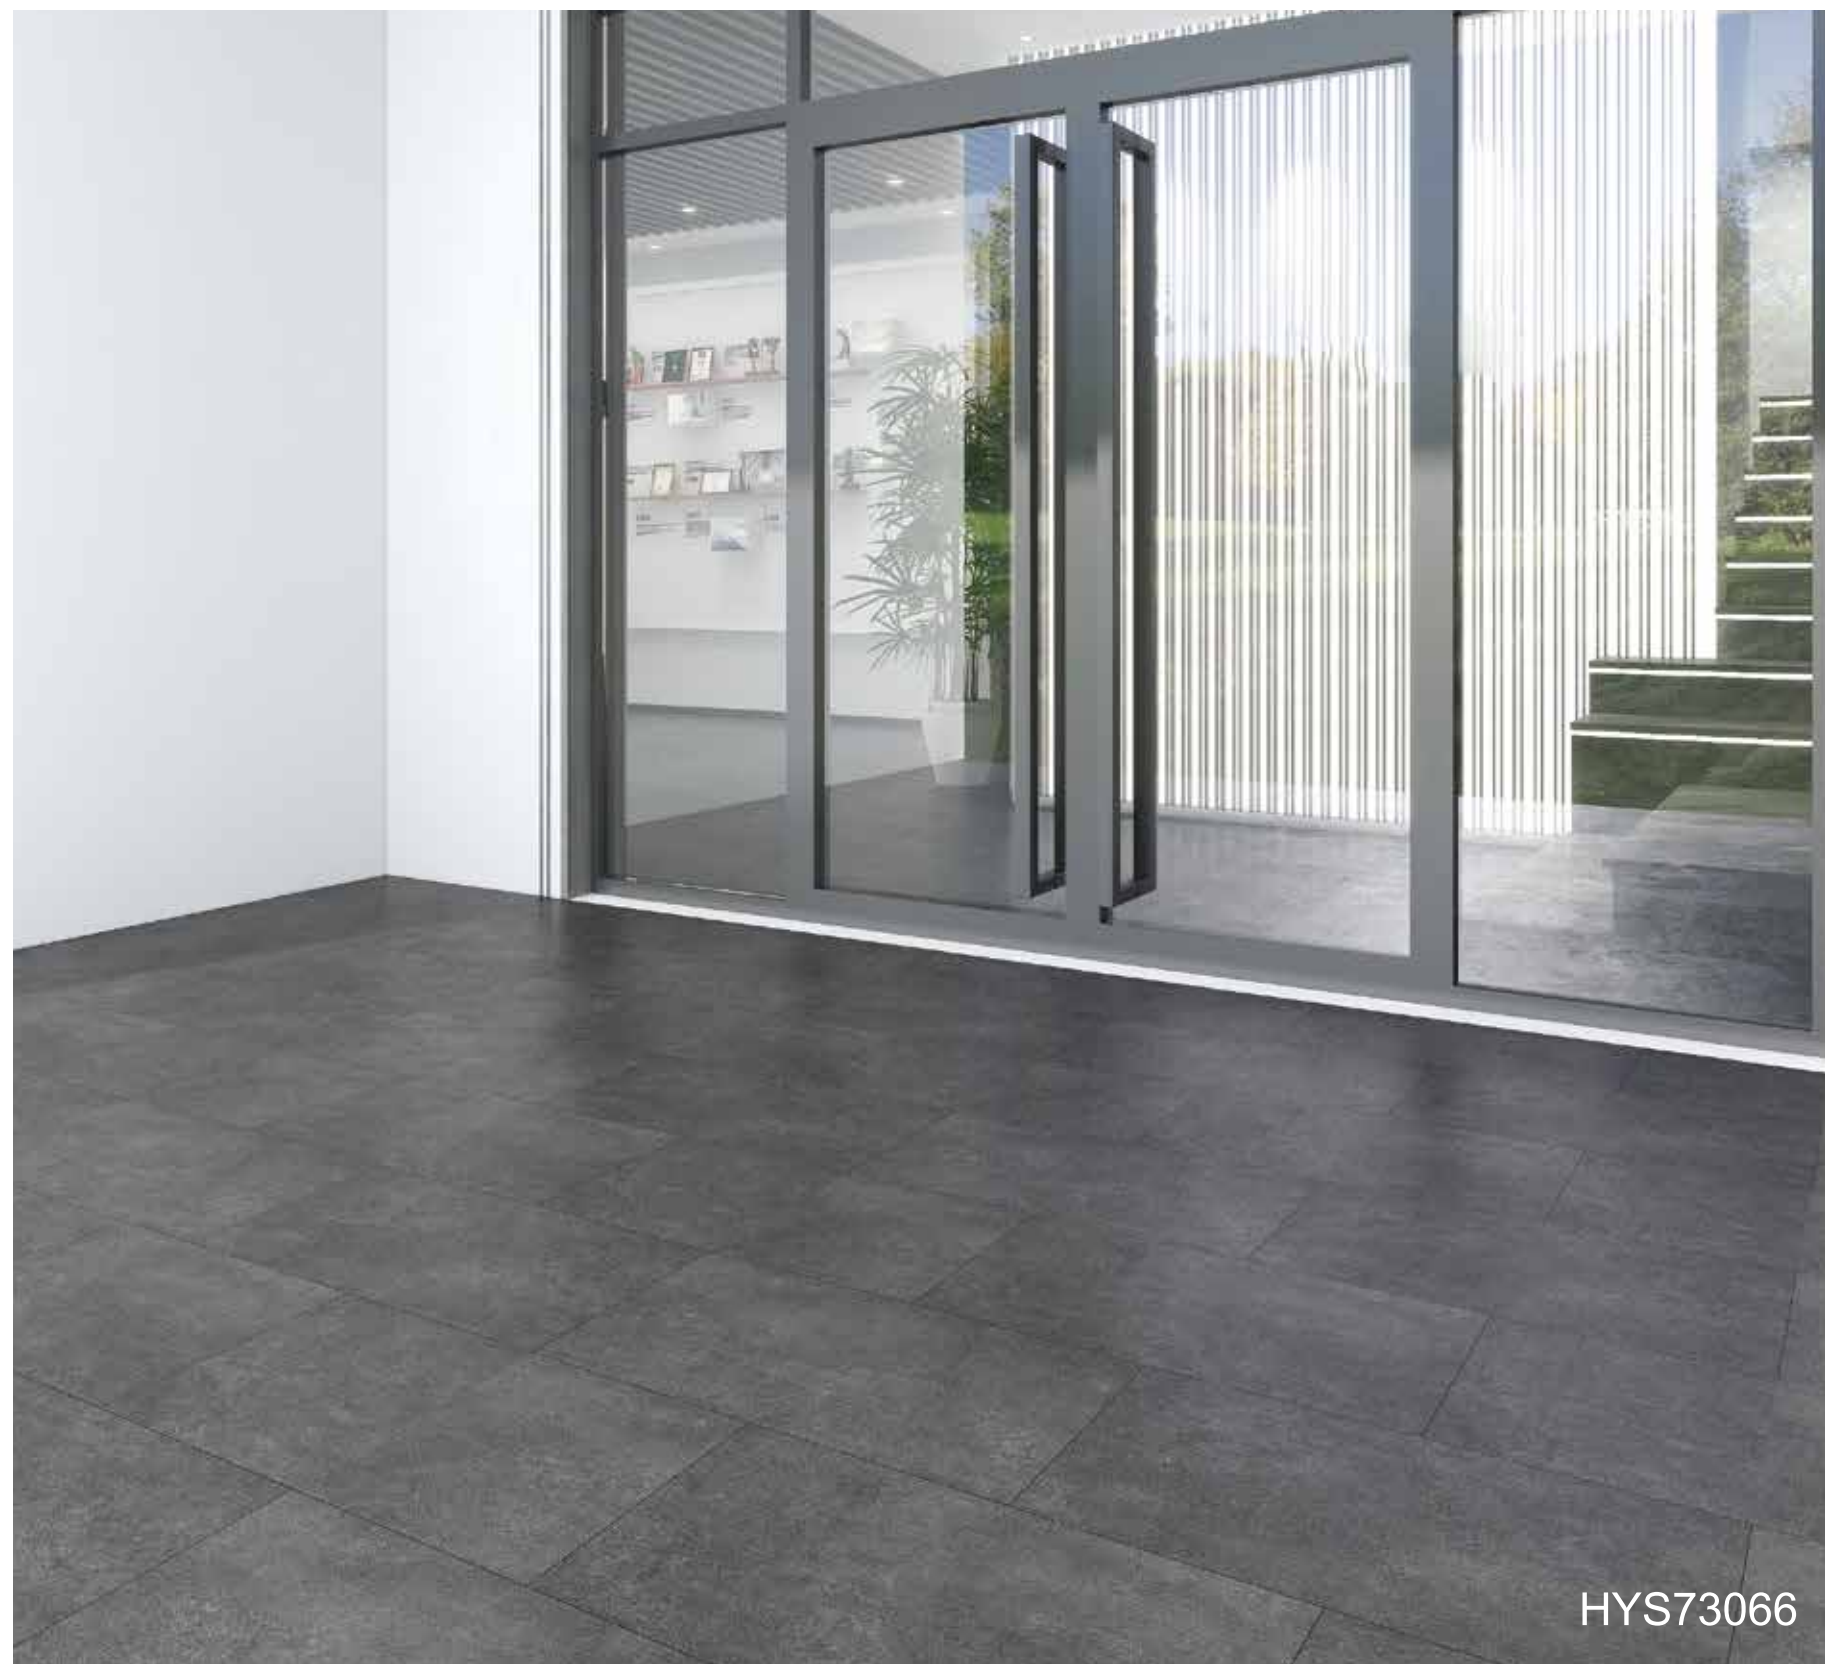

效果图及产品图片仅供纹理参考, 地板颜色请以实际为准



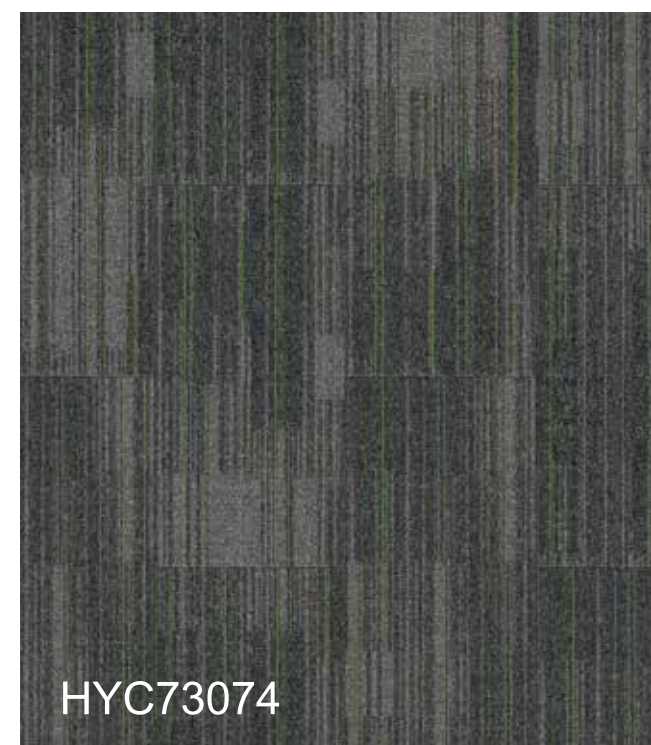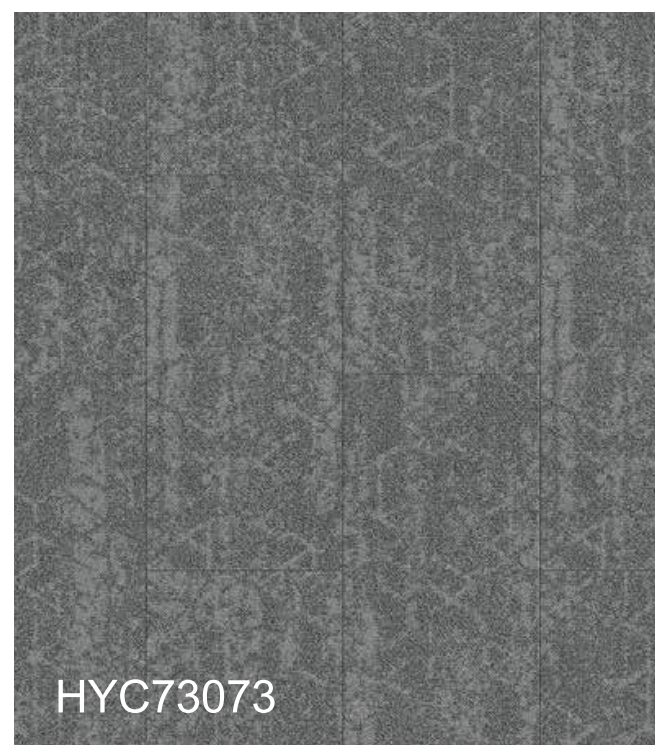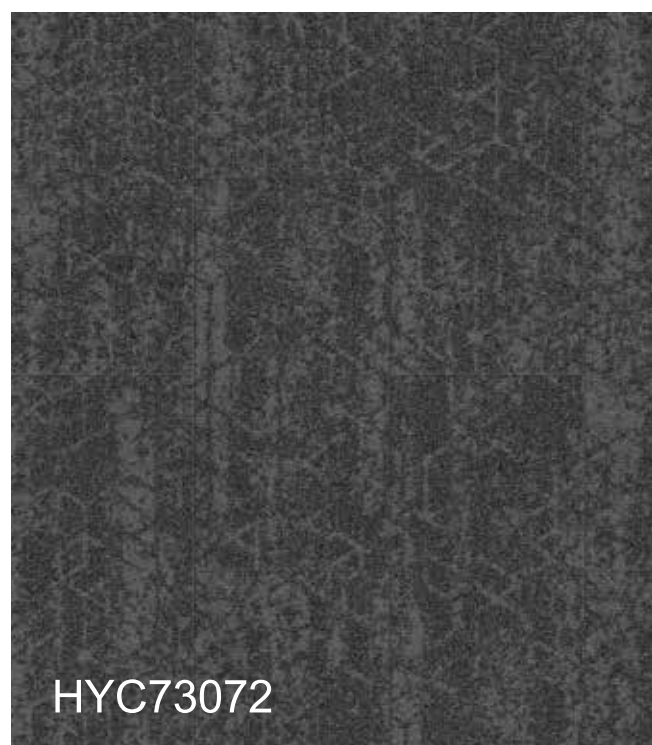




HYC73075


效果图及产品图片仅供纹理参考，地板颜色请以实际为准



HYC73076

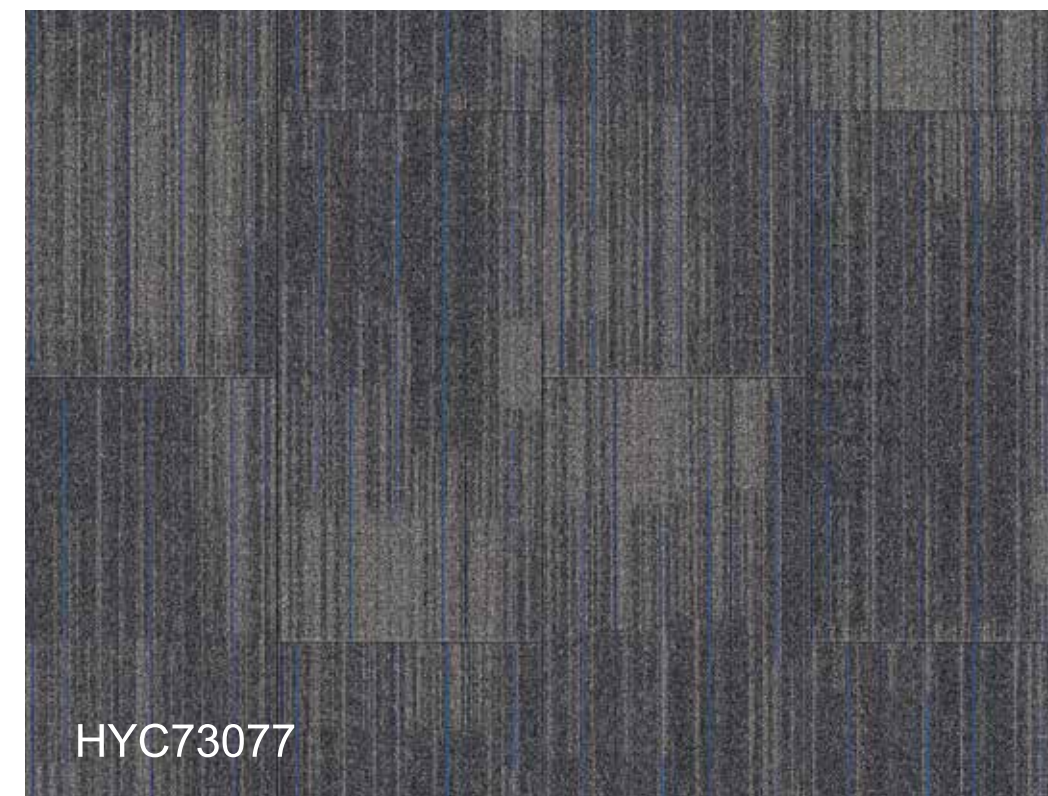

HYC73077

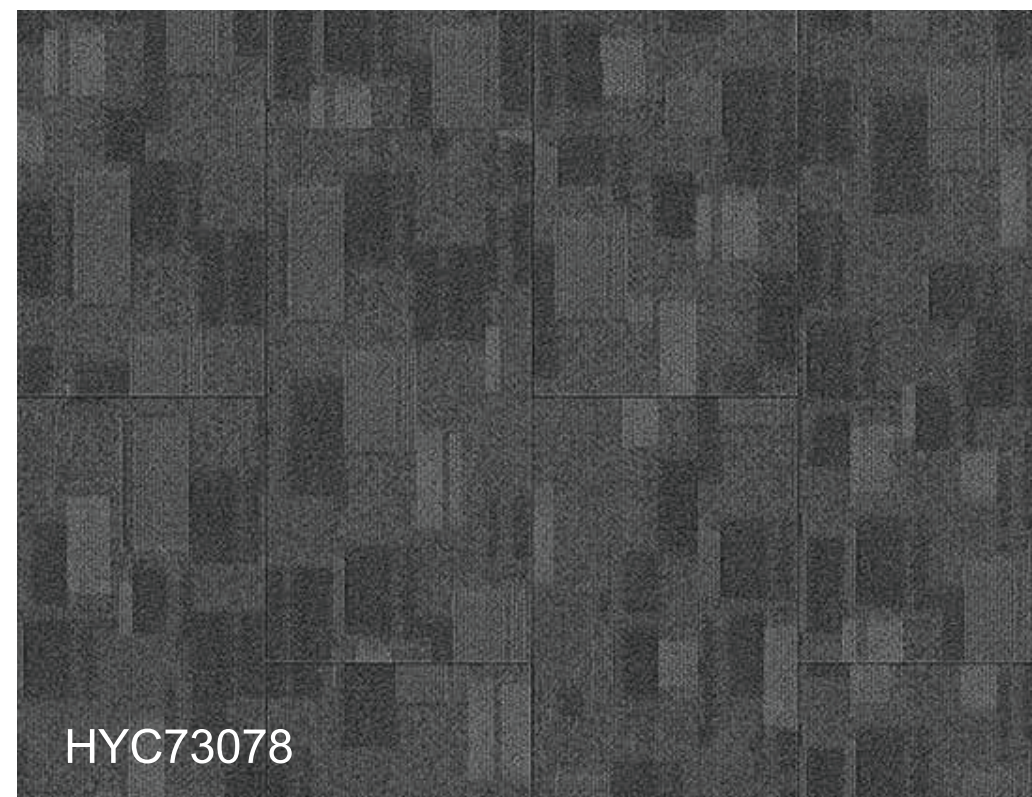

效果图及产品图片仅供纹理参考,地板颜色请以实际为准

SPC TECHNICAL DATA SHEET

CHARACTERISTICS	STANDARD	GENERALLY USED-SPC
Thickness		3.2mm-8.0mm
Micro-scratch resistance	EN 16094	MSR-B2
Squareness	ISO24342:2018	Max≤0.15mm
Straightness	ISO24342:2018	Max ≤0.2mm
Classification	ISO10582	23,31/33, 42/34,43
Dimensional stability	ISO23999:2021	≤0.12%
Curling	ISO23999:2021	≤1.0mm
Residual indentation	ISO24343-1:2007	≤0.10mm
Light stability	ISO105-B02:Method 3	≥6
Fire resistance	EN13501-1	Bf1-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN660-2	Group T
Peel resistance	ISO24345:2006	≥75N/50mm
Determination of resistance to stains chemical resistance	ISO26987:2008	No change in surface dulling, surface attack, or staining was detected
Castor chair	ISO4918: 2016	After 25000 cycles, test specimens no visible damage
Heavy metal	ASTM F 963-11	Free
Formaldehyde emissiom	EN717-1: 2004	Free

UtilizationRecyclable

LVT TECHNICAL DATA SHEET

CHARACTERISTICS	STANDARD	GENERALLY USED-LVT
Thickness		2.0mm-7.0mm
Micro-scratch resistance	EN 16094	MSR-B2
Squareness	ISO24342:2007	Max≤0.2mm
Straightness	ISO24342:2007	Max ≤0.2mm
Classification	ISO10582	23,31/33, 42/34,43
Dimensional stability	ISO23999	≤0.12%
Curling	ISO23999	≤1.2mm
Residual Indentation	ISO24343-1:2007	≤0.10mm
Light stability	ISO105-B02:Method 3	≥6
Fire resistance	EN13501-1	Bf1-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN660-2	Group T
Peel resistance	ISO24345:2006	≥75N/50mm
Determination of resistance to stains chemical resistance	ISO26987:2008	No change in surface dulling, surface attack, or staining was detected
Flexibility	ISO24344:2008 Method A	There was no cracking shown in both directions when tested with a 50 mandreal
Castor chair	ISO4918: 2016	After 25000 cycles, test specimens no visible damage
Heavy metal	ASTM F 963-11	Free
Formaldehyde Emissiom	EN717-1: 2004	Free

UtilizationRecyclable

PRODUCT SPECIFICATION 产品规格

SPC CLICK & LVT CLICK & ABA

Plank: 尺寸 (mm) 英寸 (inch)



110*610mm (4.3**24")



150*1220mm (6**48")



183*1220mm (7**48")



228*1220mm (9**48")



228*1524mm (9**60")



230*1828mm (9**72")

Tile: 尺寸 (mm) 英寸 (inch)



305*610mm (12**24")

LVT LOOSE LAY

Plank: 尺寸 (mm) 英寸 (inch)



184.15*1219.2mm (7.25**48")



228.6*1219.2mm (9**48")



228.6*1524mm (9**60")

Tile: 尺寸 (mm) 英寸 (inch)



914.4*914.4mm (36**36")



457.2*914.4mm (18**36")



457.2*457.2mm (18**18")



304.8*609.6mm (12**24")



457.2*609.6mm (18**24")

PRODUCT SPECIFICATION 产品规格

LVT GLUE DOWN (DRY BACK)

Plank: 尺寸 (mm) 英寸 (inch)



101.6*609.6mm (4"*24")



159*1229mm (6.26"*48.39")



152.4*914.4mm (6"*36")



177.8*1219.2mm (7"*48")

Tile: 尺寸 (mm) 英寸 (inch)



914.4*914.4mm (36"*36")



457.2*914.4mm (18"*36")



304.8*609.6mm (12"*24")

Plank: 尺寸 (mm) 英寸 (inch)



184.15*1219.2mm (7.25"*48")



189*1229mm (7.44"*48.39")



228.6*1219.2mm (9"*48")



228.6*1524mm (9"*60")



457.2*457.2mm (18"*18")



457.2*609.6mm (18"*24")



620*620mm (24.4"*24.4")